

Model 5070

Benefits

- Savings on your waste collection
- Ability to segregate waste
- Tidy premises
- Space saving
- Compliance to meet your legal obligations




Model 5070

- Bales at least two types of waste
- Top loader
- Allows a sort and segregate process
- Multiple chambers available



A= 216
B= 735
C= 1740
D= 1205

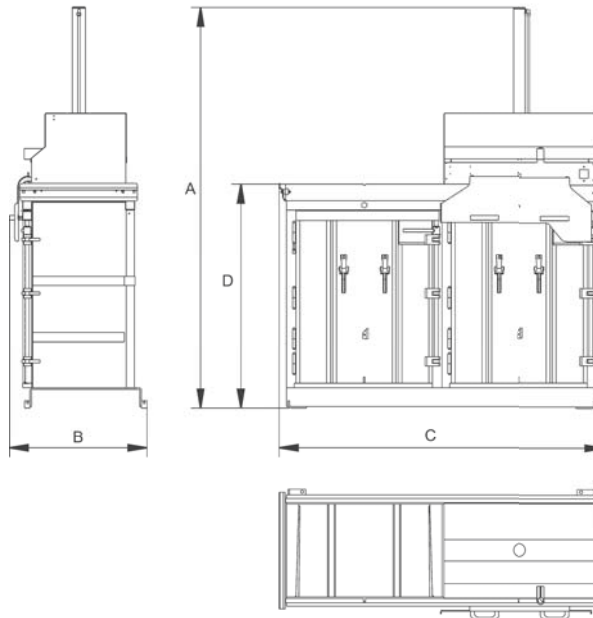

VOLTAGE	FUSE	MOTOR	IP
1 phase, 230 V, 50 Hz	10A	0.75 kW, 2780 rpm	55

Example:

Number of Uplifts:

Cost:

Comparison:

Total savings:

TECHNICAL SPECIFICATIONS

CYCLE TIME

30 secs

WEIGHT

Total: 525 kg
Double chamber only: 365 kg
Press unit only: 160 kg

MACHINE DIMENSIONS INSTALLED

Height: 2160 mm
Depth: 880 mm
Width: 1690 mm

RECOMMENDED INSTALLATION DIMENSIONS

Height: 2160 mm
Depth with open door: 2830 mm
Width: 2890 mm

CHAMBER DIMENSIONS (INTERNAL)

Depth: 500 mm
Width: 700 mm
Height: 1000 mm

BALE SIZE

Depth: 500 mm
Width: 700 mm
Height: 700 mm

GROUND COATINGS

Anti-corrosive primer

TOPCOAT

Two part paint and powder coat.

OIL VOLUME

4,9 litres

RECOMMENDED OIL: TEMP > 0°C

ISO VG 68 SAE 10

RECOMMENDED OIL: TEMP < 0°C

Lubrication Engineering LE 6520 Monolec
Hydraulic Multigrade SAE 5W-20

WORKING PRESSURE

135 bar / 1965 psi identity plate

PRESS FORCE

40000 N (4 ton)

RELIEF PRESSURE

160 bar

NOISE LEVEL

< 70 dB (A)

Orwak Environmental Services Ltd,
Unit 6, Alpha Industrial Park, Bevan Way, Smethwick B66 1BZ
Tel: 0121 565 7426 Fax: 0121 565 7427
Email: orwaksales@phs.co.uk Website: www.orwak.co.uk